


The sizes are expressed in millimeters.



DESIGN 2016  
LAMPADA DA PARETE E SOFFITTO - METALLO  
WALL AND CEILING LAMP - METAL

TRICK TRACK

CE IP20










CEILING ROSE




1A3430300.00.00	BIANCO OPACO / MATT WHITE - ON/OFF	100-240 V - 50/60 Hz - MAX 10 W LED - GU10 CAVO BIANCO 2 m - ORIENTABILE LAMPADINA NON INCLUSA ACCESSORI OPZIONALI LAMPADINA COLLEGABILI MAX 20 APPARECCHI WHITE CABLE 2 m - ADJUSTABLE BULB NOT INCLUDED OPTIONAL BULB ACCESSORIES MAXIMUM 20 CONNECTABLE LUMINAIRES
1A3430400.00.00	NERO OPACO / MATT BLACK - ON/OFF	100-240 V - 50/60 Hz - MAX 10 W LED - GU10 CAVO NERO 2 m - ORIENTABILE LAMPADINA NON INCLUSA ACCESSORI OPZIONALI LAMPADINA COLLEGABILI MAX 20 APPARECCHI BLACK CABLE 2 m - ADJUSTABLE BULB NOT INCLUDED OPTIONAL BULB ACCESSORIES MAXIMUM 20 CONNECTABLE LUMINAIRES

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

1A3440300.00.00	BIANCO OPACO / MATT WHITE	ROSONE DA PARETE E SOFFITTO WALL AND CEILING ROSE
1A3440400.00.00	NERO OPACO / MATT BLACK	

CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE	
<b>LAMPADINE LED / LED BULBS</b>											
	50330500	GU10	220-240 V	5,5 W	25°	3000K	375 lm	G	97	X	DOT P 51 DOT P DE 51 DOT PL 51 DOT R 51 DOT SISTEMA 51 MINI 51 MINI BIT 51 MINI PL 51 MOON 60 DE TRICK TRACK
	50330740	GU10	220-240 V	4,9 W	120°	3000K	550 lm	E	80	-	Q
	50330450	GU4	12 V	20 W	24°	2700K	200 lm	G	80	-	OVO OVONELPIATTO
	50330530	GU5,3	12 V	6,7 W	36°	3000K	440 lm	G	97	X	BUCO R
	50041410	E14	220-240 V	4,5 W	-	2700K	470 lm	F	>80	X	PALPEBRA
	52080010	E27	220-240 V	7 W	360°	2700K	806 lm	E	80	X	ABA 45 ABA 120 EDI SON
	50330650	E27	220-240 V	13 W	200°	2700K	1521 lm	E	80	-	LENTA MOON 60 MOON 60 DE MOON 80 MOON 200 MOON T SHOJI SHOJI OUTDOOR
	50041470	E27	220-240 V	21 W	200°	2700K	2452 lm	E	>80	X	MOON 120
	50330730	E27	220-240 V	9,5 W	25°	3000K	760 lm	F	80	X	CHILLOUT NEURO

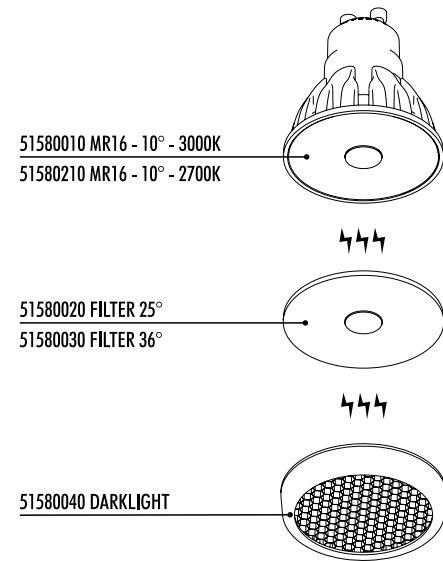

CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CrI (Ra)	DIMMABLE	PRODUCT REFERENCE
------	--------	---------	---------	----------------	-----------------	---------------	-----------------	----------	----------	-------------------

LAMPADINE LED SORAA MR16 - DIMMERABILE IGBT / SORAA LED BULBS MR16 - IGBT DIMMABLE

🔔	51580210	GU10	230 V	7,5 W	10°	2700K	390 lm	G	95	X	DOT P 51 DOT P DE 51 DOT PL 51 DOT R 51 DOT SISTEMA 51
	51580010	GU10	230 V	7,5 W	10°	3000K	410 lm	G	95	X	MINI 51 MINI BIT 51 MINI PL 51 TRICK TRACK

ACCESSORI "POINT SOURCE OPTICS" PER GENERARE FASCI UNIFORMI E DI ALTA INTENSITA' / "POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS

51580020	FILTER - MR16			25°							DOT P 51 DOT P DE 51 DOT PL 51 DOT R 51 DOT SISTEMA 51
51580030	FILTER - MR16			36°							MINI 51 MINI BIT 51 MINI PL 51 TRICK TRACK
51580040	DARKLIGHT - MR16			-							